THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST
H	—

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	ECR-07-007198	29 MAR 07	RPE	AH
	A	FIRST ISSUE	01 JUL 05	RC	JE

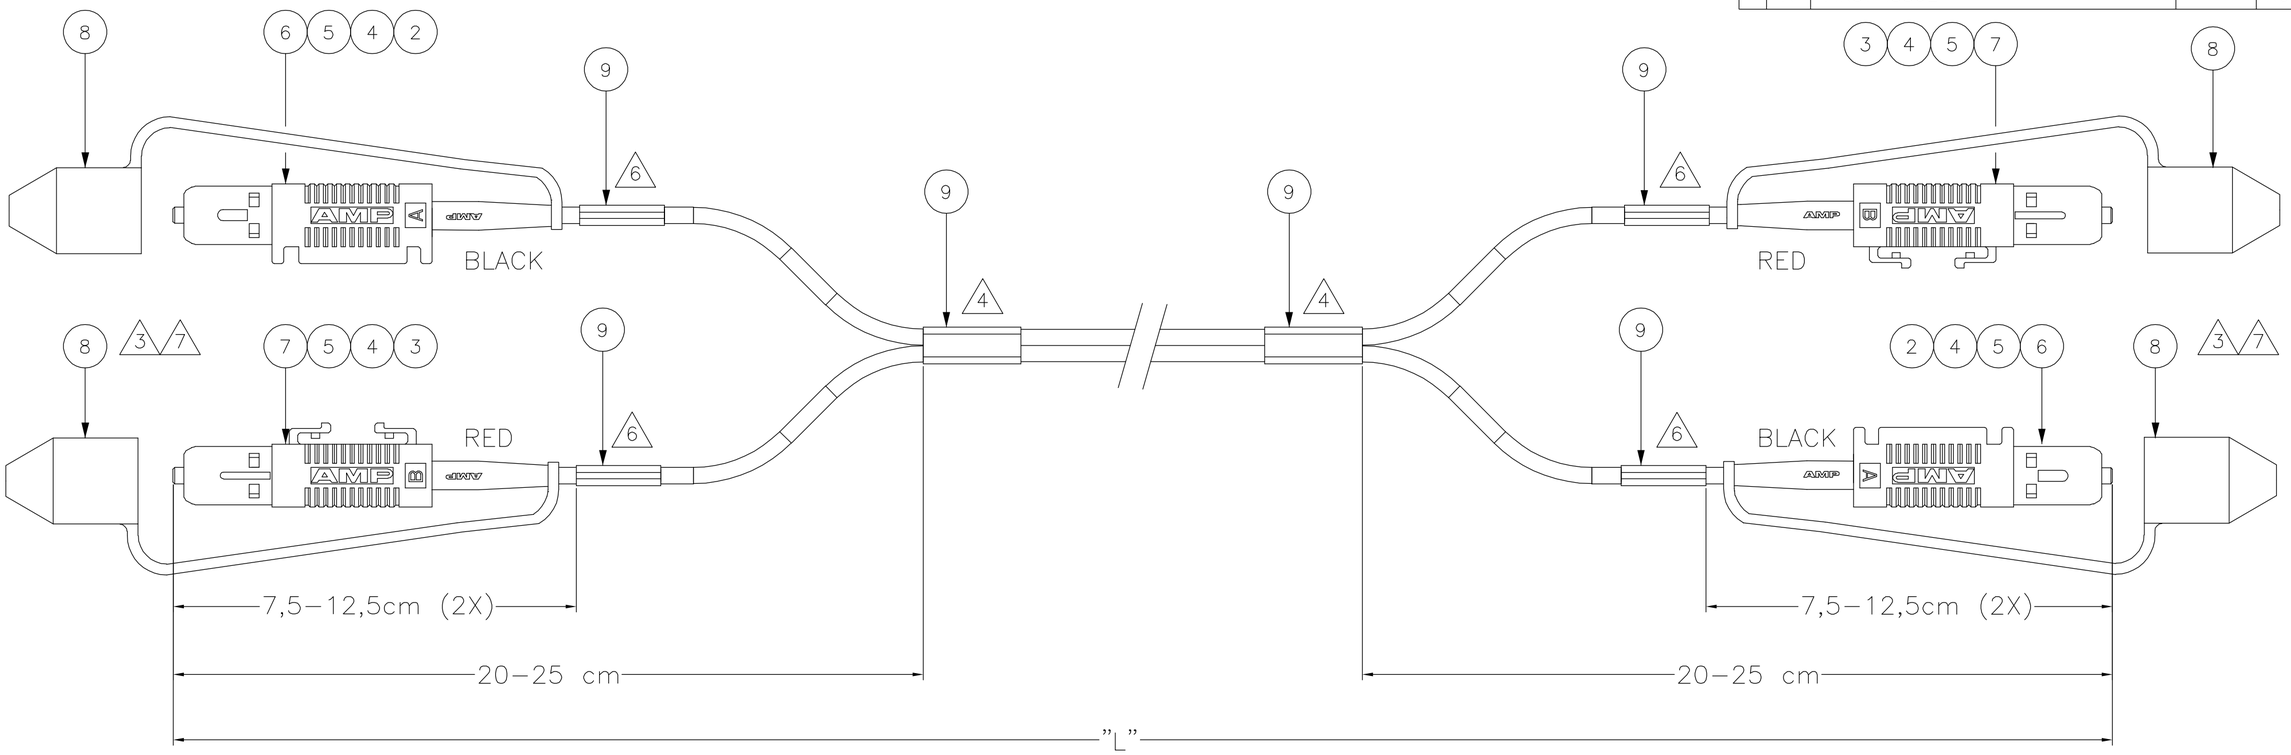

NOTES:

1. INSERTION LOSS ≤ 0.3 dB, MEASURED AGAINST REF. CONN.
2. RETURN LOSS ≥ 45 dB, MATED
3. TUNED CONNECTOR
4. BLANK LABEL
5. CABLE:
   - 9/125/900µm
   - CABLE DIAM.: 3,0mm
   - CABLE COLOUR: YELLOW
   - TIGHT
   - OUTER SHEATH MATERIAL: LSZH
6. INFO ON CABLE LABEL:
   - UNIQUE SERIAL NUMBER
   - TYCO PARTNUMBER
   - P.O. NUMBER
   - INSERTION LOSS AND RETURN LOSS AT 1310nm
7. LENGTH DIFFERENCE 5 mm MAX.

STANDARD LENGTHS ACCORDING TO CUSTOMER DRAWING 1206850	
PART NUMBER	"L" (meter)
X-6348260-Y	XY,0
8-6348260-2	2,25 +0,10/-0

Qty	Part Number	Description	Item
6	—	CABLE LABEL	9
4	—	SC CAP PROTECTIVE, WITH STRAP BLACK	8
2	—	SC DUPLEX HOUSING, BEAM HALF, BLUE	7
2	—	SC DUPLEX HOUSING, RETENTION PLATE, BLUE	6
4	—	SC PLUG ASSY, SINGLEMODE, BEIGE, 125µm	5
4	—	CRIMP EYELET, 3mm	4
2	—	SC STRAIN RELIEF, RED, 3mm	3
2	—	SC STRAIN RELIEF, BLACK, 3mm	2
L	—	DUAL CABLE 3.0mm, SM, LSZH, YELLOW	1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -

MATERIAL -
FINISH -

DWN R. COOLEN 01 JUL 05
CHK ARIE HENGELMOLEN 26 OCT 05
APVD ARIE HENGELMOLEN 26 OCT 05
PRODUCT SPEC -
APPLICATION SPEC -
WEIGHT -

tyco Electronics — Tyco Electronics Nederland BV, 's-Hertogenbosch, Netherlands

NAME: FOSM LEAD 3.0T DUPLEX SC/PC/TUN - SC/PC/TUN

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-6348260	-

CUSTOMER DRAWING | SCALE -:- | SHEET 1 OF 1 | REV B

6348260